

# CC-2807WF-20

## WDR Analog Turret Dome Camera



### 720TVL 960H+ with IR and 3.6mm Fixed Lens

- ☞ New 960H+ technology for unsurpassed picture clarity
- ☞ IP66 rated weatherproof housing
- ☞ WDR technology for great performance in all lighting
- ☞ True day/night performance, utilizing a motorized IR cut filter
- ☞ 0 lux with IR LEDs on
- ☞ 24 IR LED built-in array with smart IR LED control for IR projection up to 65 feet
- ☞ OSD menu with cable-mounted joystick
- ☞ 3-axis body design for easy installation on a wall or ceiling
- ☞ 12vDC
- ☞ 3 3/4" (diameter) x 2 3/4" (height)





#### Optional Accessories:



Contact your Crest Representative today to learn more about this product!



# Product Data: CC-2807WF-20 WDR Analog Turret Dome Camera

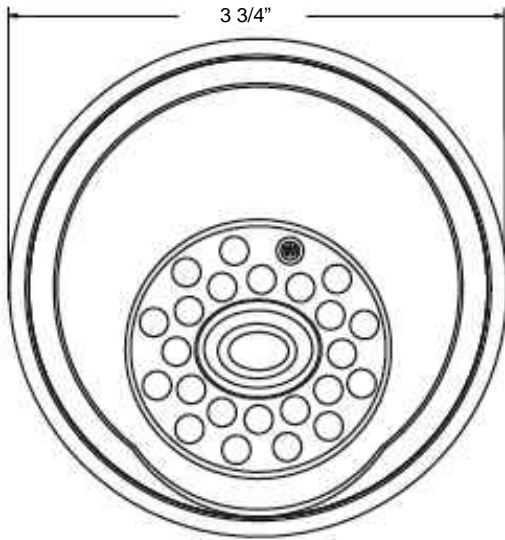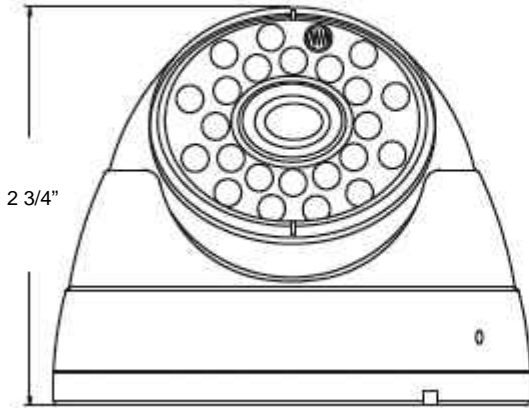

<b>Model Number</b>	<b>CC-2807WF-20</b>
<b>Product Description</b>	Sony Effio-A Powered 960H+ IR Turret Dome
<b>Image Pick-Up Device</b>	1/3" Sony Super HAD CCD II Effio A (960H WDR)
<b>Horizontal Resolution</b>	720 TV Lines
<b>Minimum Illumination</b>	0.001 Lux in Color; 0 Lux with IR On
<b>S/N Ratio</b>	More than 52dB
<b>Auto Electronic Shutter</b>	NTSC: 1/60-1/100,000s
<b>Auto Gain Control</b>	User Selectable
<b>Auto White Balance</b>	User Selectable
<b>Back Light Compensation</b>	User Selectable
<b>Scanning System</b>	2:1 Interlace
<b>Gamma Characteristic</b>	0.45
<b>Lens Furnished</b>	3.6mm Fixed Lens
<b>Synchronous System</b>	Internal, Negative Sync
<b>Video Output</b>	1 Vp-p / 75 Ohms, BNC Connector
<b>Infrared Luminary</b>	24 pieces Smart IR LED
<b>Wave Length</b>	850nm
<b>Projection Distance</b>	Up to 65 feet
<b>Day/Night Activation</b>	User Selectable
<b>Sense Up</b>	Auto / Off
<b>Power Supply</b>	12vDC +/-10%
<b>Power Consumption</b>	350mA with LED On
<b>Operating Temperature</b>	14 ~ 122°F
<b>Dimensions</b>	3 3/4" (dia) x 2 3/4" (h)

<b>Model Number</b>	<b>CC-2807WF-20</b>
<b>Product Description</b>	Sony Effio-A Powered 960H+ IR Turret Dome
<b>Image Pick-Up Device</b>	1/3" Sony Super HAD CCD II Effio A (960H WDR)
<b>Horizontal Resolution</b>	720 TV Lines
<b>Minimum Illumination</b>	0.001 Lux in Color; 0 Lux with IR On
<b>S/N Ratio</b>	More than 52dB
<b>Auto Electronic Shutter</b>	NTSC: 1/60-1/100,000s
<b>Auto Gain Control</b>	User Selectable
<b>Auto White Balance</b>	User Selectable
<b>Back Light Compensation</b>	User Selectable
<b>Scanning System</b>	2:1 Interlace
<b>Gamma Characteristic</b>	0.45
<b>Lens Furnished</b>	3.6mm Fixed Lens
<b>Synchronous System</b>	Internal, Negative Sync
<b>Video Output</b>	1 Vp-p / 75 Ohms, BNC Connector
<b>Infrared Luminary</b>	24 pieces Smart IR LED
<b>Wave Length</b>	850nm
<b>Projection Distance</b>	Up to 65 feet
<b>Day/Night Activation</b>	User Selectable
<b>Sense Up</b>	Auto / Off
<b>Power Supply</b>	12vDC +/-10%
<b>Power Consumption</b>	350mA with LED On
<b>Operating Temperature</b>	14 ~ 122°F
<b>Dimensions</b>	3 3/4" (dia) x 2 3/4" (h)

*Specifications subject to change*

