■ Specification

Model	CCA-7910WS-40
Pick up Element	1/4" Aptina 1.0MP CMOS Sensor
Effective Picture Elements (H×V)	NTSC: 1280(H)×720(V)
Resolution	720p
Minimum Illumination	0.01 Lux/F1. 2
	0Lux (with IR LED ON)
S/N Ratio	More than 50dB
Scanning System	2:1 interface
Synchronous System	Internal, Negative sync.
Auto Electronic Shutter	NTSC: 1/30s~1/60,000s
Gama Characteristic	0.45
IR Distance	131 Feet (with ⊄5X42 PCS Infrared LED)
Video Output	1Vp-p, 75Ω (AHD or 960H)
Auto Gain Control	Auto
Power/Current	12VDC(+/-10%)/700mA
Lens	2.8-12mm Manual Zoom Lens
Dimension (in)	11.5(W) x 3.6(H) x 3.7(D)
Weight (lb)	3.43
Storage Temperature	-22°F~140°F RH95% MAX
Operating Temperature	14°~122°F RH95% MAX

■ Packing List

No	Name	Model	Number
1.	Weatherproof IR Bullet Camera w/mount	CCA-7910WS-40	1
2.	User Guide	CCA-7910WS-40	1

CCA-7910WS-40 Color Camera

Weatherproof IR Bullet Camera AHD/960H Analog



www.crestel ectronics.com




NOTE: Please read this guide BEFORE installing




■ BRIEF OF PRODUCT

- * Sensor (CCD)
 1/4" Aptina 1.0MP CMOS Sensor
- * Auto Gain Control (AGC)

 Built-in auto gain control (AGC) circuit. The color camera can get high definition picture in low Lux condition.
- * Scanning Mode NTSC
- * Water Resistance IP66

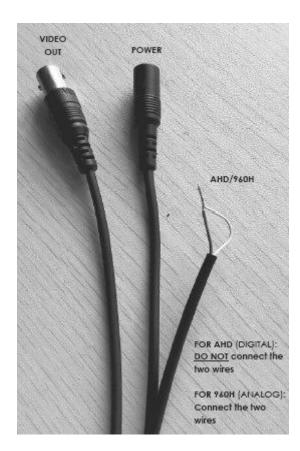

■ Device connection



TROUBLE AND SOLUTION

TROUBLESHOOTING			
NO VIDEO	 ◆ Power Supply Check input power connections at the terminal (DC input wires) ◆ Voltage Range Measure the voltage at the terminal block. The supply range is: 12VDC. ◆ Video Connection Determine if wiring polarity at "Video Connector" is correct. If ok, the problem may be with the interconnections/splices. 		
ROLLING PICTURE	◆ Check to make sure the coax shield is not touching "ground"		
POOR PICTURE	◆ Ensure that the video cable is terminated with 75 ohms at each end.		

■ INTRODUCTION

The Crest Electronics CCA-7910WS-40 camera is based on the latest high-resolution AHD sensor and is capable of delivering a resolution of 720p (1MP). The Wide Dynamic Range of the sensor allows the camera to capture detailed images even in challenging lighting conditions. With built in Smart IR and varifocal lens, this camera can be used to suit a wide variety of needs.

Please read this instruction manual carefully to ensure proper use of the camera.



NOTICE: For best result, please read this instruction booklet prior to installing the CCA-7910WS-40 camera.



CAUTION:



RISK OF ELECTRIC. DO NOT OPEN

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER OR BACK NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO OUALIFIED SERVICE PERSONNEL.

CAUTION: CSA CERTIFIED/UL LISTED CLASS 2 POWER
ADAPTORS MUST BE USED IN ORDER TO
COMPLY WITH ELECTRICAL SAFETY STANDARDS.



Note:

- Please note the camera's operating temperature is 14°F~122°
- Use of the product outside this range is not recommended.
- This installation should be made by a qualified service person and conform to all local codes. Crest Electronics will not be responsible for damages or injuries as a result of improper installation.