CVB-404 4 Channel Active Receiver Hub




- 4 port active receiver module
- Built in high balance mode for superior interference immunity
- Built in transient protection and ground lifting




Product Data: CVB-404 4 Channel Active Receiver Hub


Installation View:

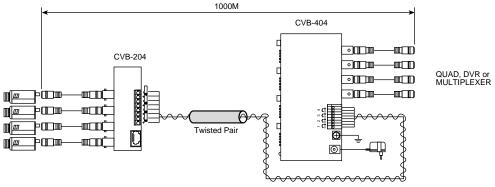

Panel View:







Rear View

Use CVB-204 4 channel passive video transceiver as transmitter to work with active CVB-404 receiver for transmission range of 3200 feet. Use CVB-301T transmitter to work with CVB-404 for transmission range of 4900 feet with a color signal or 7800 feet with a B/W signal.

Model Number
Video Input
Video Signal Input
Video Gain Adjustment
Video Output
Transmission Distance
Recommended Cable
Power Source
Power Consumption
Dimensions

1	CVB-404
	4, Terminal Block
	1 Vp-p, 75 Ohm
	Potentiometer
	4 (BNC)
	3200 ft with Passive TX / 4900 ft with Active TX
	CAT-5 UTP, 4 Pair (24AWG)
	12vDC
	150mA (max)
	5 3/8"w x 2 1/2"h x 1 1/8"d

Specifications subject to change



Video Security Since 1974