


# CKB-3300

## Multi-Function Keyboard

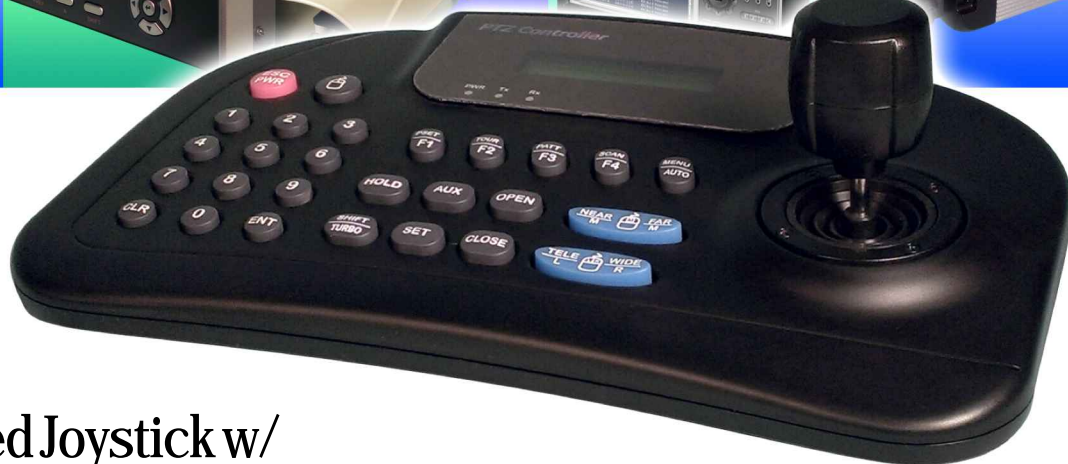

### 3-Axis, Variable Speed Joystick w/ RS-485 & RS-422 Communication

- Industry standard protocols – allows keyboard to work with many of the popular cameras on the market with RS-485/RS-422 data connections, including Crest CDP models
- Built-in code merger – allows keyboard to work with DVR for dual control of PTZs
- Controls up to 255 cameras
- Built-in backlit LCD display
- Multiple function keys for programming (tours, patterns, presets, etc.)
- User password and system hold function
- Slave function for linking multiple keyboards together without the need for additional equipment (up to max of 64)

|                               |   |
|-------------------------------|---|
| <b>Model Number</b>           | <b>CKB-3300</b>   |
| <b>Communication</b>          | Interface: RS-485 / RS-422<br>Operating Distance: 4000ft on 24 AWG wire |
| <b>Supported Protocols</b>    | Multiple (Pelco-D, Pelco-P, etc.)                                       |
| <b>Connector Type</b>         | Terminal Block (8p) / USB / Half or Full Duplex                         |
| <b>Keyboard Button</b>        | Rubber button / numeric keypad and camera function key                  |
| <b>Joystick</b>               | 3-axis, variable speed with zoom  |
| <b>Display</b>                | 2 x 16 character LCD with backlight                                     |
| <b>Power</b>                  | (9V Battery) 12vDC, 140ma   |
| <b>Operating TempHumidity</b> | 32° ~ 113°F<br>10% - 70% non-condensing                                 |
| <b>Dimensions</b>             | 11" w x 3 5/8" h x 6 7/8" d   |
| <b>Weight</b>                 | 1 lb, 9 oz  |

*Specifications subject to change*

Contact your Crest Representative today  
to learn more about this product!



# Product Data: CKB-3300 Multi-Function Keyboard

|                              |   |
|------------------------------|---|
| <b>Model Number</b>          | <b>CKB-3300</b>   |
| <b>Communication</b>         | Interface: RS-485 / RS-422<br>Operating Distance: 4000ft on 24 AWG wire |
| <b>Supported Protocols</b>   | Multiple (Pelco-D, Pelco-P, etc.)                                       |
| <b>Connector Type</b>        | Terminal Block (8p) / USB / Half or Full Duplex                         |
| <b>Keyboard Button</b>       | Rubber button / numeric keypad and camera function key                  |
| <b>Joystick</b>              | 3-axis, variable speed with zoom  |
| <b>Display</b>               | 2 x 16 character LCD with backlight                                     |
| <b>Power</b>                 | (9V Battery) 12vDC, 140ma   |
| <b>Operating Temperature</b> | 32° ~ 113°F   |
| <b>Humidity</b>              | 10% - 70% non-condensing  |
| <b>Dimensions</b>            | 11"w x 3 5/8"h x 6 7/8"d  |
| <b>Weight</b>                | 1 lb, 9 oz  |

*Specifications subject to change*

