

CC-7907WF-21

960H Analog IR Bullet Camera



720TVL WDR with IR and 3.6mm Fixed Lens

- New 960H chipset for unsurpassed picture clarity
- IP66 rated weatherproof housing
- WDR technology for great low-light performance
- Electronic day/night performance
- 0 lux with IR LEDs on
- 24 IR LED built-in array for IR projection up to 65 feet
- OSD menu for easy set-up with cable mounted mini-controller
- Integral sunshield
- 12vDC operation
- 2 3/4" (width) x 2 1/2" (height) x 6 5/8" (length)



Optional Accessory:




CTL-201
Head-end OSD Controller
Specifically for the CJ-2907WF-24

Contact your Crest Representative today
to learn more about this product!




Product Data: CC-7907WF-21 960H Analog IR Bullet Camera

Front View

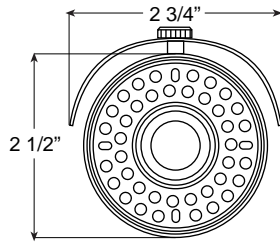

Side View

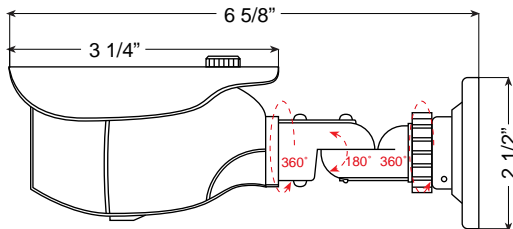

- Model Number**
- Product Description**
- Image Pick-Up Device**
- Certifications**
- Horizontal Resolution**
- Minimum Illumination**
- S/N Ratio**
- Shutter Speed**
- Auto Gain Control**
- Auto White Balance**
- Scanning System**
- Gamma Characteristic**
- Lens Furnished**
- Synchronous System**
- Video Output**
- Infrared Luminary**
- Projection Distance**
- Power Supply**
- Power Consumption**
- Operating Temperature**
- Dimensions**

CC-7907WF-21	
Product Description	Outdoor 960H WDR Infrared Bullet Camera
Image Pick-Up Device	1/3" Sony Super HAD II Effio-A CCD 720TVL
Certifications	IP66
Horizontal Resolution	720 TV Lines
Minimum Illumination	0 Lux (IR LED on)
S/N Ratio	More than 52dB
Shutter Speed	1/60-1/100,000s
Auto Gain Control	Auto / Manual
Auto White Balance	ATW / Push / User 1 / User 2 / Manual / Push Lock
Scanning System	2:1 Interlace
Gamma Characteristic	0.45
Lens Furnished	3.6mm Fixed Lens
Synchronous System	Internal
Video Output	1 Vp-p / 75 ohms, BNC Connector
Infrared Luminary	24 Pieces
Projection Distance	65 feet max
Power Supply	12vDC +/-5%
Power Consumption	500mA min (Camera + IR LED on)
Operating Temperature	0°C ~ 122°F
Dimensions	2 3/4"W x 2 1/2"H x 6 5/8"L

Specifications subject to change

