CVB-216 16 Port Passive Transceiver Hub




- Built in 16 port passive transceivers in 1U 19" rack mounting panel
- As a rack mounted passive transmitter hub, use with CVB-416 active receiver hub at distance up to 3200 feet
- Sassive no power required
- Built in a highly balanced mode of video transmission for extra interference immunity



Video Security Since 1974

Product Data: CVB-216 16 Port Passive Transceiver Hub

Installation View:

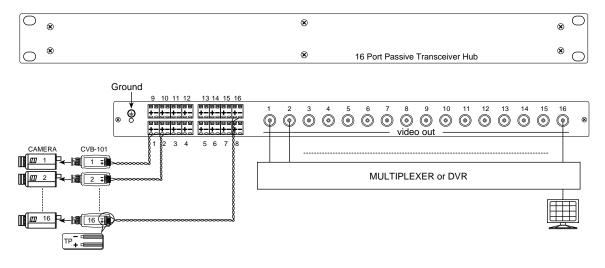

CVB-216 is a multi video transceiver designed for one compact 19" wide 1U panel. Panels can reside in the same rack as other equipment, such as switchers, multiplexers, DVR, video conferencing equipment, etc. It's perfect for larger CCTV installations and ideal for security monitoring stations.

Model Number	CVB-216
Video Input	16, Terminal Block
Video Signal Input	1 Vp-p, 75 Ohm
Video Gain Adjustment	Dip Switch
Video Output	16 (BNC)
Transmission Distance	300m / 900 ft (color)
Recommended Cable	CAT-5 UTP, 4 Pair (24AWG)
Power Source	Passive
Power Consumption	N/A
Dimensions	19"w x 6 3/4"h x 1 3/4"d
Weight	4 lb, 13 oz

Specifications subject to change



Video Security Since 1974

3706 Alliance Drive | Greensboro, NC 27407 | 1-888-50-CREST | www.crestelectronics.com